

PUSTEFIX GmbH
 Kilchberg, Bahnhofstraße 29
 72072 Tübingen


Tel. 07071 - 791005
 Fax 07071 - 791007
 info@pustefix-promotion.de



www.pustefix-promotion.de

TECHNICAL SPECIFICATIONS
Label Printing transparent


as per: 01.02.2022
 page: 1/2


| | | | |
|------------------------------------|---|---|---|
| Safety | | <p>Many PUSTEFIX toys are marked with the "spiel gut" ("play well") label, all products fulfill all requirements of the EN71 for the safety of toys. Such safety is guaranteed by the producer. Pursuant to the provisions the toys are to be labeled with the standardized, at least 5mm high CE emblem and with the user instruction: "WARNING! Not suitable for children under 36 months. Choking hazard due to swallowable liquid". In addition all consumer products need to be marked with the producer name and mail address. This can be your clients information as well as your or our information. Due to the individual printing the labeling has to be considered in the customer's layout.</p> <p>The contractor guarantees the copyrights to the motive used and shall be liable for compliance with the legal provisions.</p> | |
| Material | | Transparent glossy adhesive paper 80 g/qm, wood-free. | |
| Gumming | | Strongly adhesive. | |
| Format | label | Classic 42 ml transparent tube | Height x Circumference 85,0 x 99,0 mm |
| | print data incl. 1,5 mm trimming on each side | Classic 42 ml transparent tube | Height x Circumference 88,0 x 102,0 mm |
| Form | | Rectangle. | |
| Features | | With varnish. | |
| Presentation | | On roller. Core diameter min. Outer diameter max. Label spacing min. Label spacing max. | 76.0 mm 260.0 mm 3.0 mm 4.4 mm |
| Arrangement | | Labels arranged lengthwise. | |
| Winding | | left ahead, outside. |  |
| Data transmission up to max. 10 MB | | via e-mail in PDF format | |
| Data | | QuarkXPress 9.5 Photoshop CC Illustrator CC Corel Draw 12.0 Indesign CC | MAC / PC MAC / PC MAC / PC PC MAC |
| | | Open-format data with all corresponding fonts and images or EPS files with fonts converted into curves and the corresponding images. | |
| Images | | Please save all images for scale printing CMYK, no RGB. Images must always be inserted 1:1 into data. Use min. 300 dpi images. | |
| Colors | | No RGB colors, do not set up black in CMYK. | |
| Reverse Script | | As far as possible, only use single-colored background for reverse script. Do not use serif or script fonts. Font size min. 10 pt. | |



TECHNICAL SPECIFICATIONS
Label Printing

as per: 01.02.2022
page: 2/2

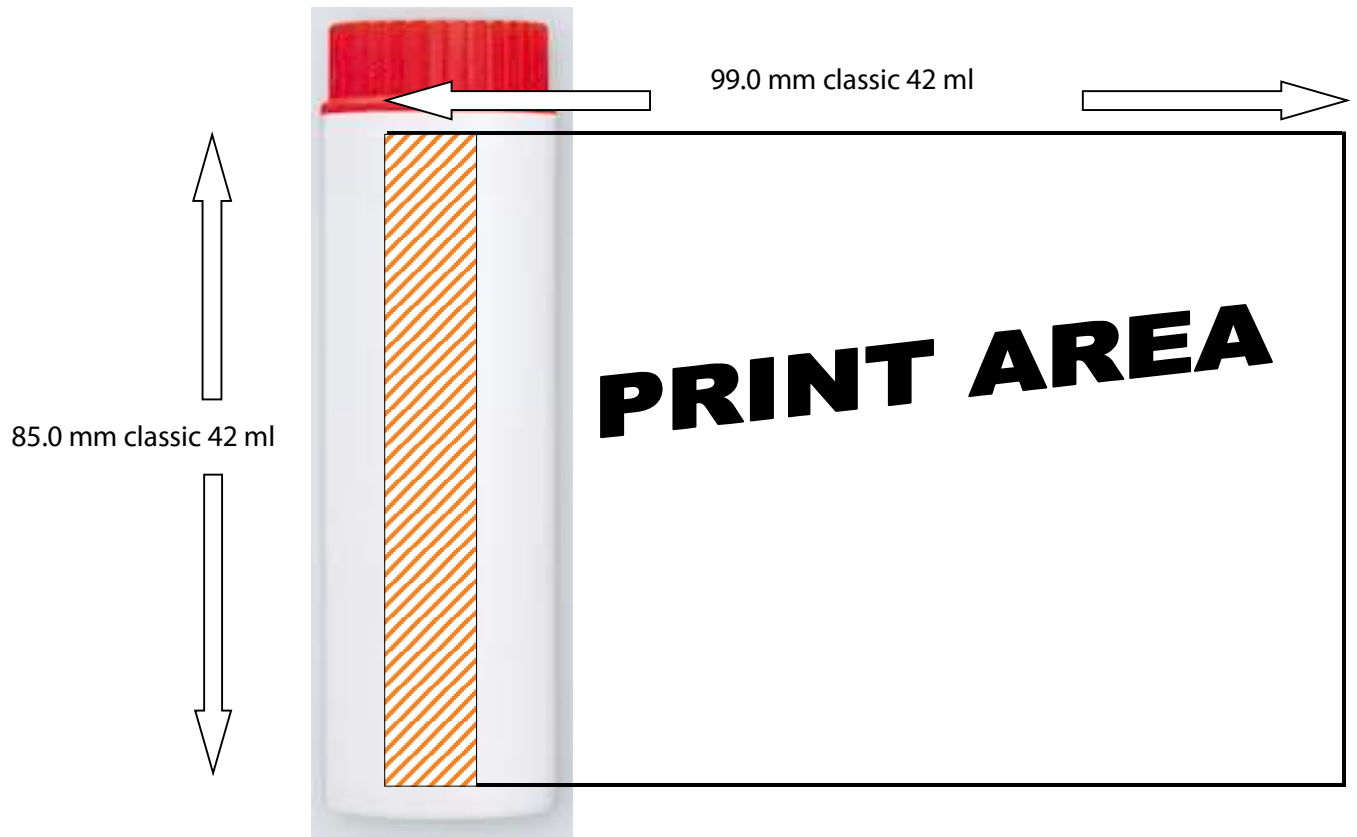

 small tube overlap area -5 mm