



PUSTEFIX GmbH Kilchberg, Bahnhofstraße 29 72072 Tübingen	Tel. 07071 - 791005 Fax 07071 - 791007 info@pustefix-promotion.de	
TECHNICAL SPECIFICATIONS Label Printing stone paper	as per: 01.01.2024 page: 1/2	www.pustefix-promotion.de

Safety	<p>Many PUSTEFIX toys are marked with the "spiel gut" ("play well") label, all products fulfill all requirements of the EN71 for the safety of toys. Such safety is guaranteed by the producer. Pursuant to the provisions the toys are to be labeled with the standardized, at least 5mm high CE emblem and with the user instruction: "WARNING! Not suitable for children under 36 months. Choking hazard due to swallowable liquid". In addition all consumer products need to be marked with the producer name and mail address. This can be your clients information as well as your or our information. Due to the individual printing the labeling has to be considered in the customer's layout.</p> <p>The contractor guarantees the copyrights to the motive used and shall be liable for compliance with the legal provisions.</p>		
Material	Stone paper white matt 100% cellulose free		
Gumming	Water-based acrylic adhesive permanently adherent		
Format	label	Classic 42 ml	Height x Circumference 85,0 x 104,0 mm
	print data incl. 3,0 mm trimming on each side	Classic 42 ml	Height x Circumference 91,0 x 110,0 mm
Form	Rectangle with corner radius 0.5 mm.		
Features	Stone paper with velvety feel and matte appearance. Liquid resistant.		
Presentation	On roller. Core diameter min. Outer diameter max. Label spacing min. Label spacing max.		76.0 mm 260.0 mm 3.0 mm 4.4 mm
Arrangement	Labels lengthwise, 1-lane.		
Winding	Word beginning ahead, outside.		
Data transmission up to max. 10 MB	via e-mail in PDF format		
Data	Illustrator CS6/CC Indesign CS6/CC Photoshop CS6/CC Acrobat DC		
	Include all Tiff and EPS components used in the document. Send all fonts (Postscript fonts + character sets or True Type fonts) or convert them to character paths. Fonts should be at least 2 mm from the punch outline. Note overprint function (do not set white to overprint). Do not create black from 4 colors.		
Images	Please save all images for scale printing CMYK, no RGB. Images must always be inserted 1:1 into data. Use min. 300 dpi images.		
Colors	No RGB colors, do not set up black in CMYK.		

PUSTEFIX GmbH
Kilchberg, Bahnhofstraße 29
72072 Tübingen


Tel. 07071 - 791005
Fax 07071 - 791007
info@pustefix-promotion.de




www.pustefix-promotion.de

TECHNICAL SPECIFICATIONS
Label Printing stone paper

as per: 01.01.2024
page: 2/2

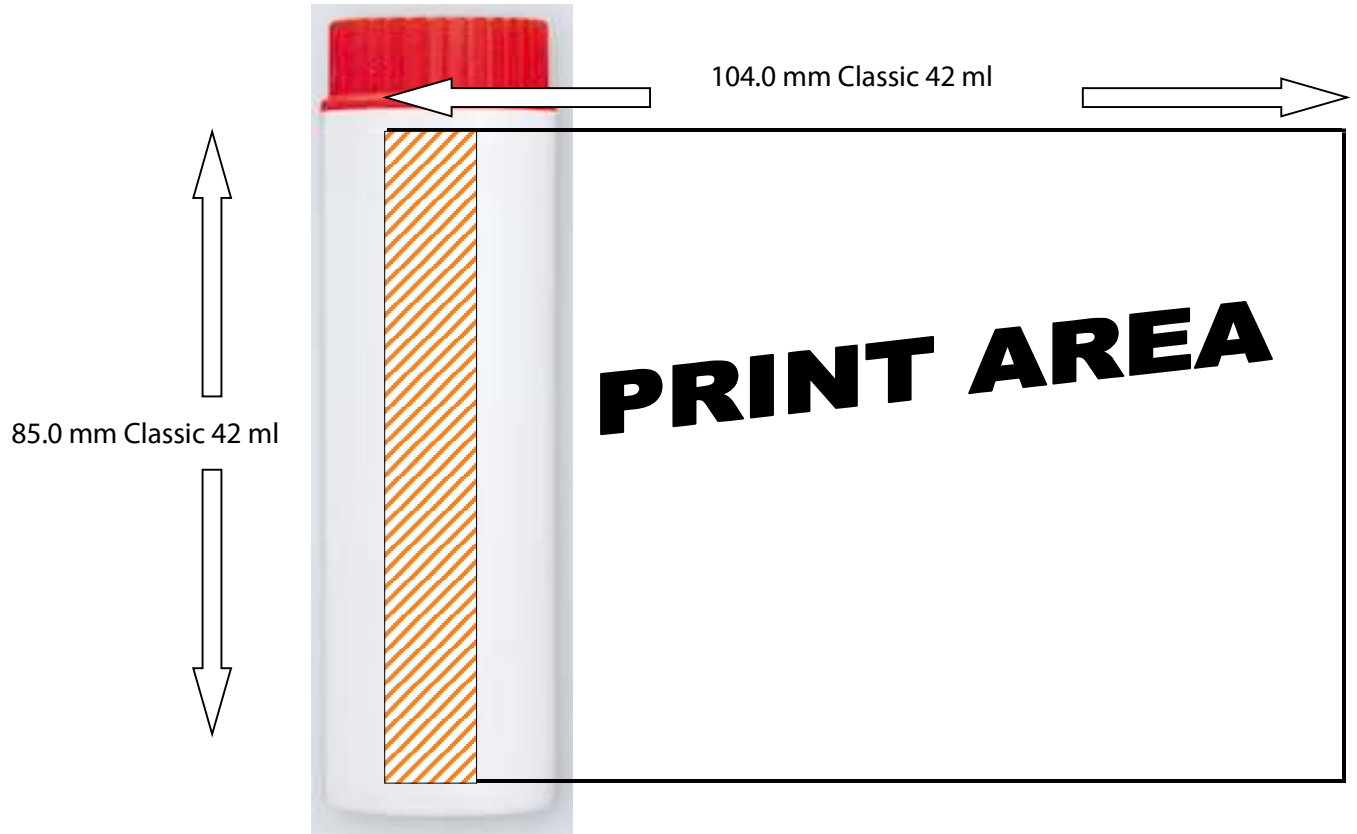

 Classic 42 ml overlap area – 9 mm