



PUSTEFIX GmbH Kilchberg, Bahnhofstraße 29 72072 Tübingen	Tel. 07071 - 791005 Fax 07071 - 791007 info@pustefix-promotion.de	 PROMOTION PRODUCTS www.pustefix-promotion.de
TECHNICAL SPECIFICATIONS Label Printing stone paper		as per: 19.12.2024 page: 1/2

Safety		<p>Many PUSTEFIX toys are marked with the "spiel gut" ("play well") label, all products fulfill all requirements of the EN71 for the safety of toys. Such safety is guaranteed by the producer. Pursuant to the provisions the toys are to be labeled with the standardized, at least 5mm high CE emblem and with the user instruction: "WARNING! Not suitable for children under 36 months. Small parts. Choking hazard!". In addition all consumer products need to be marked with the producer name and mail address and the electronic address (e.g. e-mail or link to contact form) at which the manufacturer can be contacted. This can be your clients information as well as your or our information. Due to the individual printing the labeling has to be considered in the customer's layout.</p> <p>The contractor guarantees the copyrights to the motive used and shall be liable for compliance with the legal provisions.</p>	
Material		Stone paper white matt 100% cellulose free	
Gumming		Water-based acrylic adhesive permanently adherent	
Format	label	Classic 42 ml	Height x Circumference 85,0 x 104,0 mm
	print data incl. 3,0 mm trimming on each side	Classic 42 ml	Height x Circumference 91,0 x 110,0 mm
Form		Rectangle with corner radius 0.5 mm.	
Features		Stone paper with velvety feel and matte appearance. Liquid resistant.	
Presentation		On roller. Core diameter min. Outer diameter max. Label spacing min. Label spacing max.	76.0 mm 260.0 mm 3.0 mm 4.4 mm
Arrangement		Labels lengthwise, 1-lane.	
Winding		Word beginning ahead, outside.	
Data transmission up to max. 10 MB		via e-mail in PDF format	
Data		Illustrator CS6/CC Indesign CS6/CC Photoshop CS6/CC Acrobat DC	
		Include all Tiff and EPS components used in the document. Send all fonts (Postscript fonts + character sets or True Type fonts) or convert them to character paths. Fonts should be at least 2 mm from the punch outline. Note overprint function (do not set white to overprint). Do not create black from 4 colors.	
Images		Please save all images for scale printing CMYK, no RGB. Images must always be inserted 1:1 into data. Use min. 300 dpi images.	
Colors		No RGB colors, do not set up black in CMYK.	

PUSTEFIX GmbH
Kilchberg, Bahnhofstraße 29
72072 Tübingen


Tel. 07071 - 791005
Fax 07071 - 791007
info@pustefix-promotion.de




www.pustefix-promotion.de

TECHNICAL SPECIFICATIONS
Label Printing stone paper

as per: 19.12.2024
page: 2/2

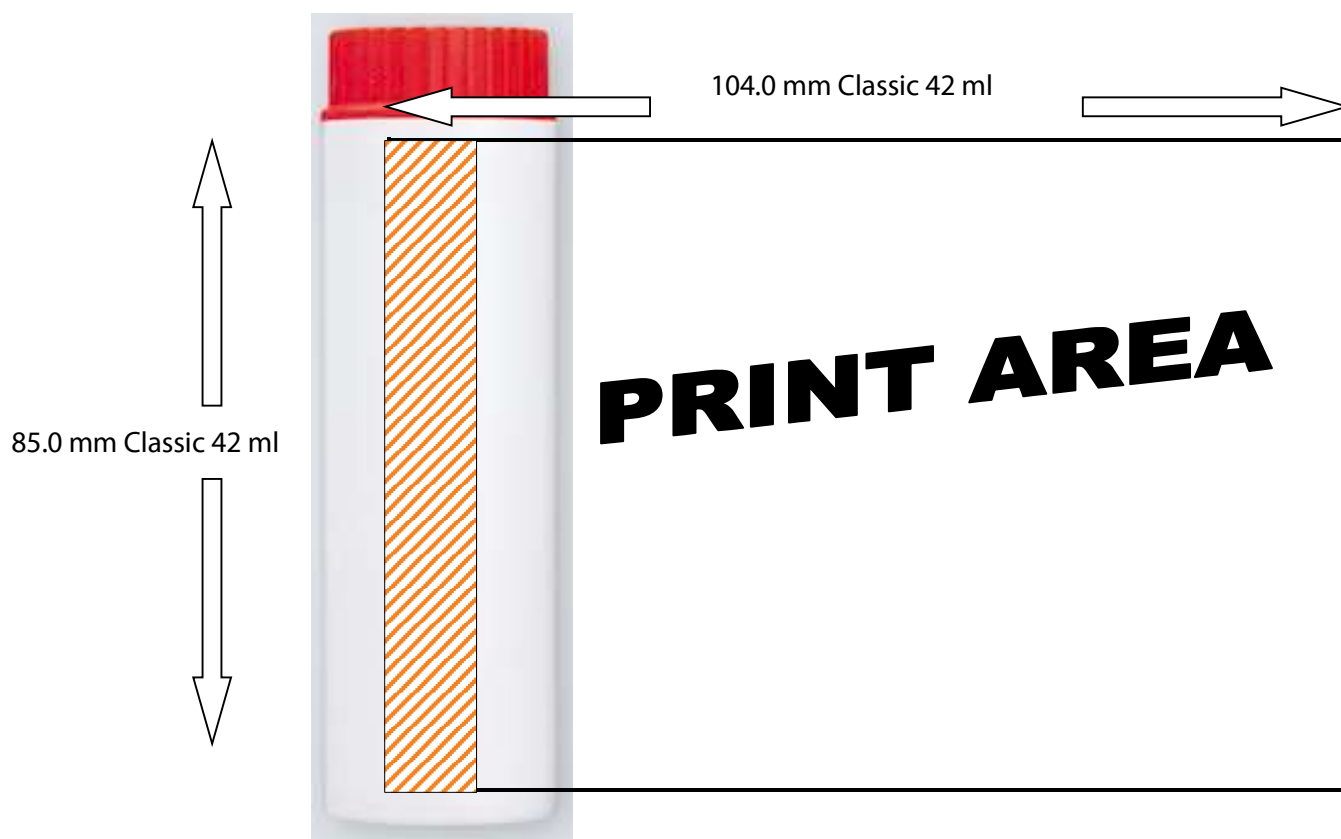

 Classic 42 ml overlap area – 9 mm